




Return rollers with polyurethane rings for Paper & Pulp applications.

Polyurethane 90 ShA hardness, resistant to material abrasion and aggression from the wood resins.

2 Rollers

series with rings

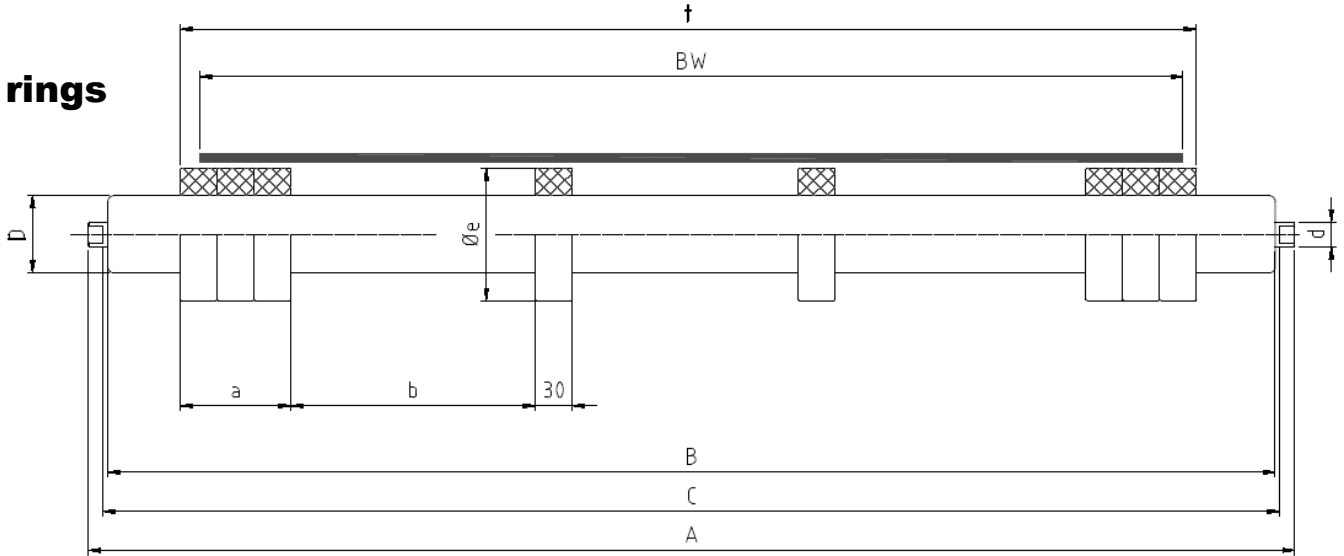


Ø 63/108
Ø 89/133

BW	B	C	a	b	t	side pack ring N.	central ring N.	total ring N.	Weight Kg			
									PSV1 63/108	PSV1 89/133	PSV2 89/133	PSV4 89/133
500	600	608	90	163	535	3	1	7	6.4	8.4		
650	750	758	90	147	680	3	2	8	7.6	10	11.6	
800	950	958	120	177	830	4	2	10	9.6	12.2	14.1	16.3
1000	1150	1158	120	177	1037	4	3	11	11.3	14.6	16.8	19.3
1200	1400	1408	150	163	1235	5	4	14	13.2	17.3	19.6	22.6
1400	1600	1608	150	163	1430	5	5	15	15.3	19.3	22	25.3
1600	1800	1808	180	156	1630	6	6	18		21.4	24.4	28.1

A dimension according to shaft execution F or Y (see table below)

Standard shaft exec. F

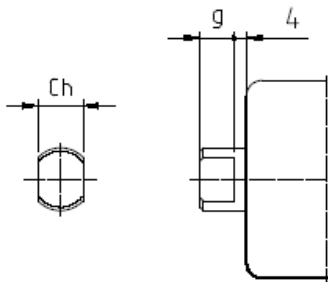

Roller type	d	Ch	D	Øe	Std. shaft exec. F	Opt. shaft exec. Y
					g	g
PSV1	20	14	63	108	9	8.5
PSV1	20	14	89	133	9	8.5
PSV2	25	18	89	133	12	11.5
PSV4	30	22	89	133	12	11.5

Option shaft exec. Y

